

FIG. 1

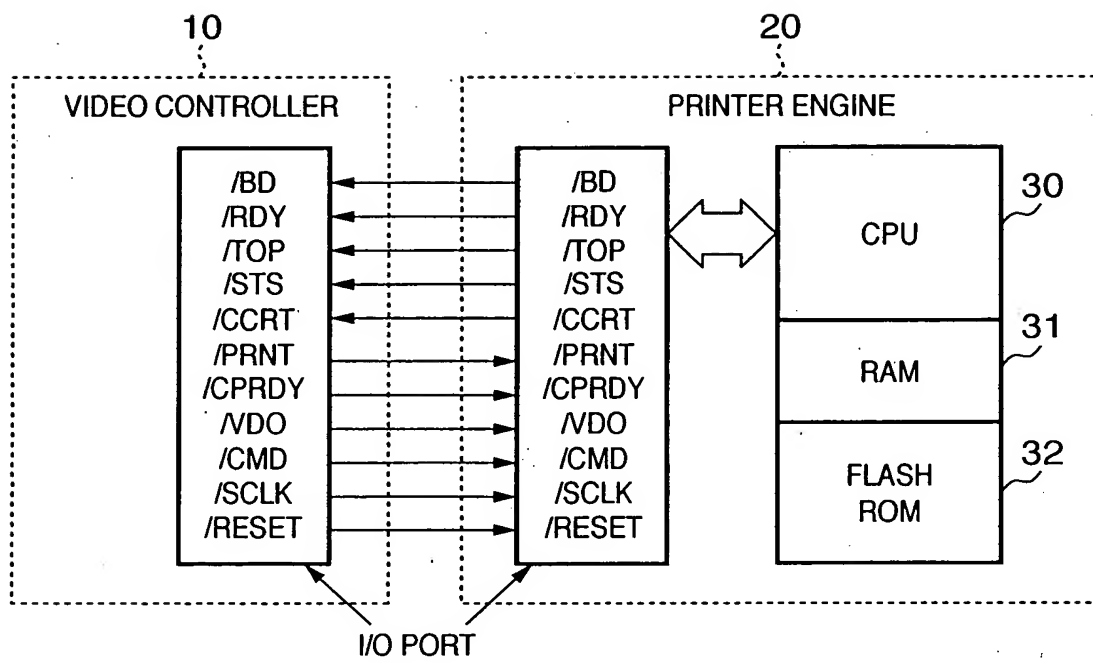


FIG. 2

SIGNAL NAME	ABBREVIATION	NATURE
BEAM DETECTION	/BD	OUTPUT (PULSE)
READY	/RDY	OUTPUT (LEVEL)
TOP OF PAGE	/TOP	OUTPUT (PULSE)
STATUS	/STS	OUTPUT (LEVEL)
CONDITION CHANGE REPORT	/CCRT	OUTPUT (LEVEL)
PRINT	/PRNT	INPUT (LEVEL)
CONTROLLER POWER READY	/CPRDY	INPUT (LEVEL)
VIDEO	/VDO	INPUT (LEVEL)
COMMAND	/CMD	INPUT (LEVEL)
CLOCK	/SCLK	INPUT (PULSE)
RESET	/RESET	INPUT (LEVEL)

FIG. 3

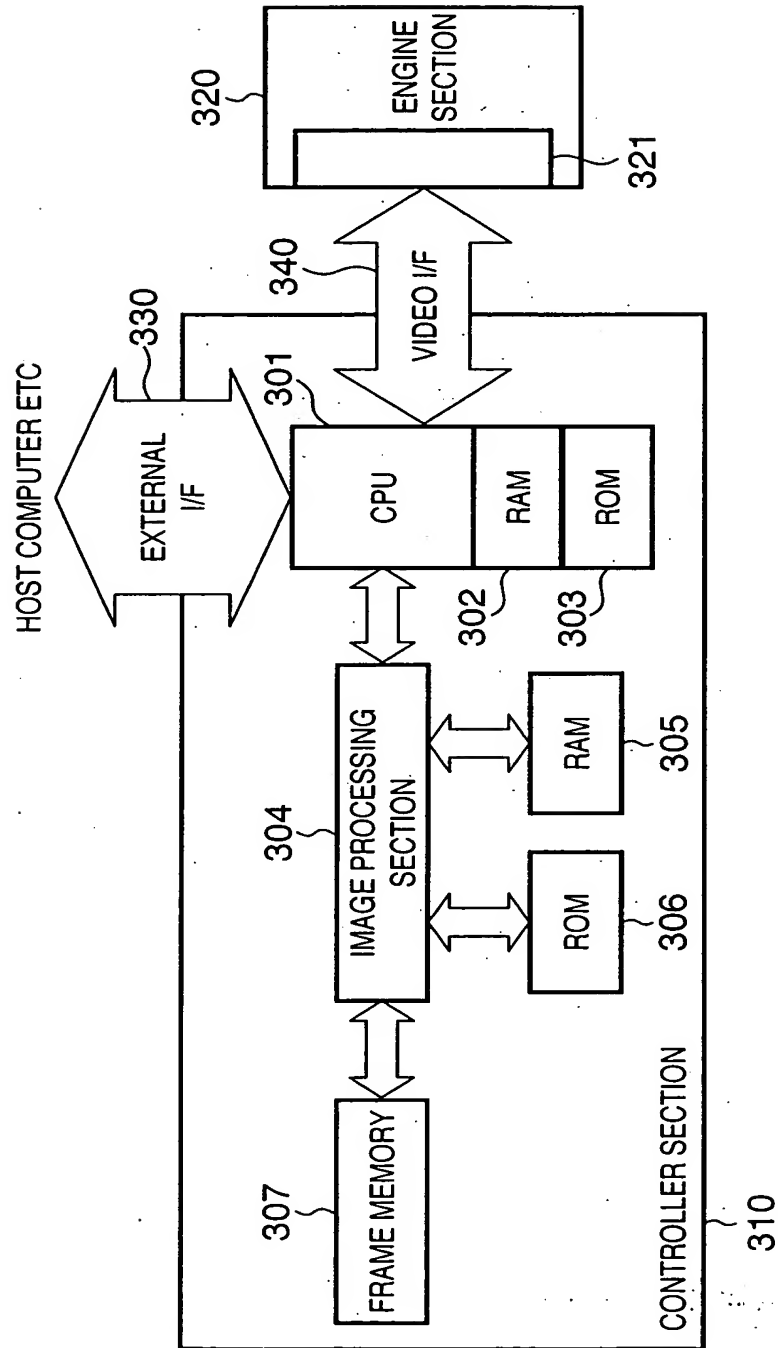


FIG. 4

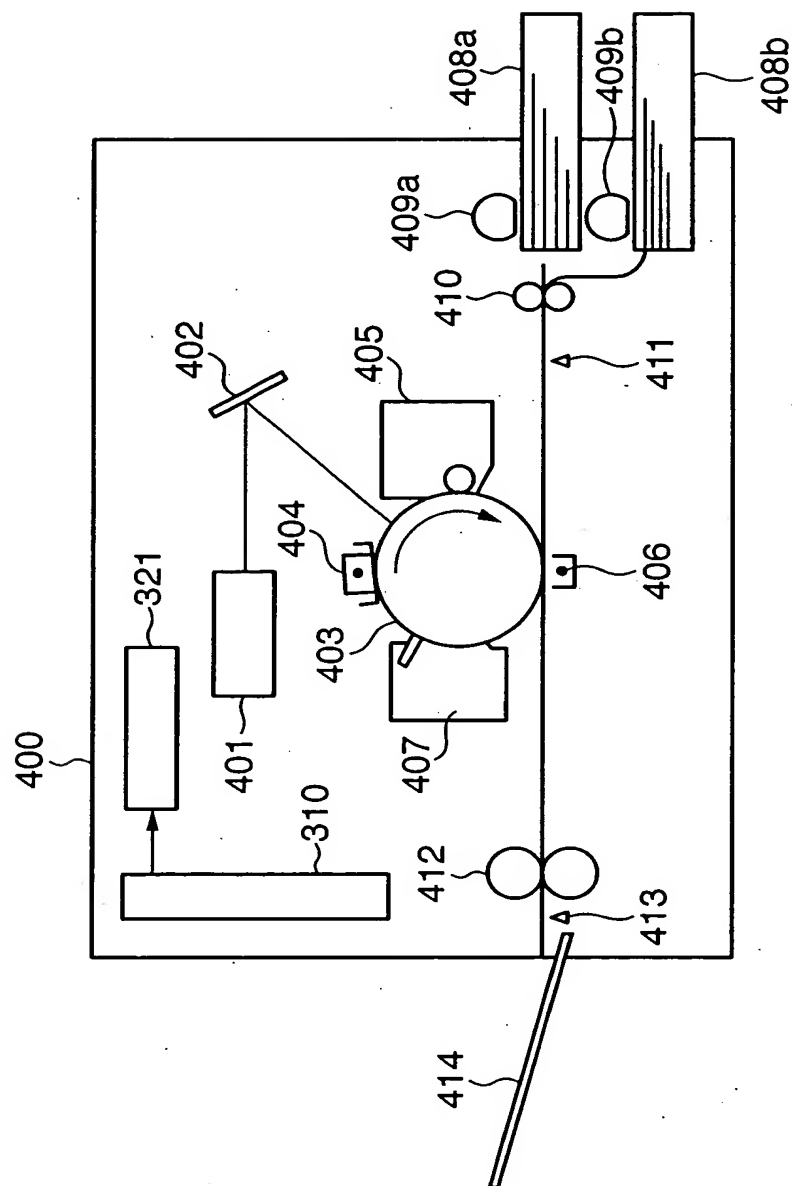


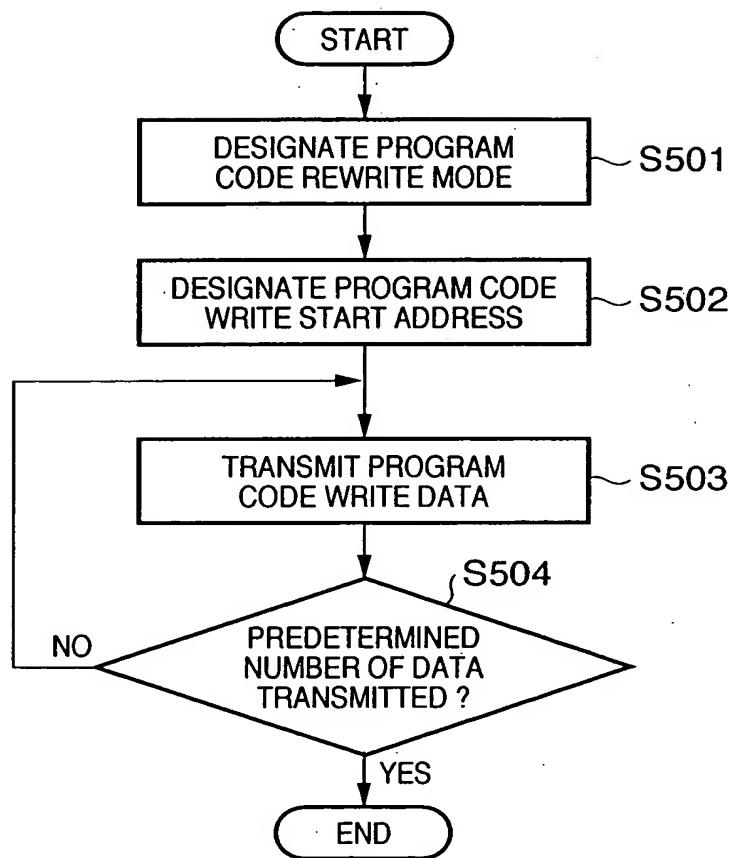
FIG. 5

FIG. 6

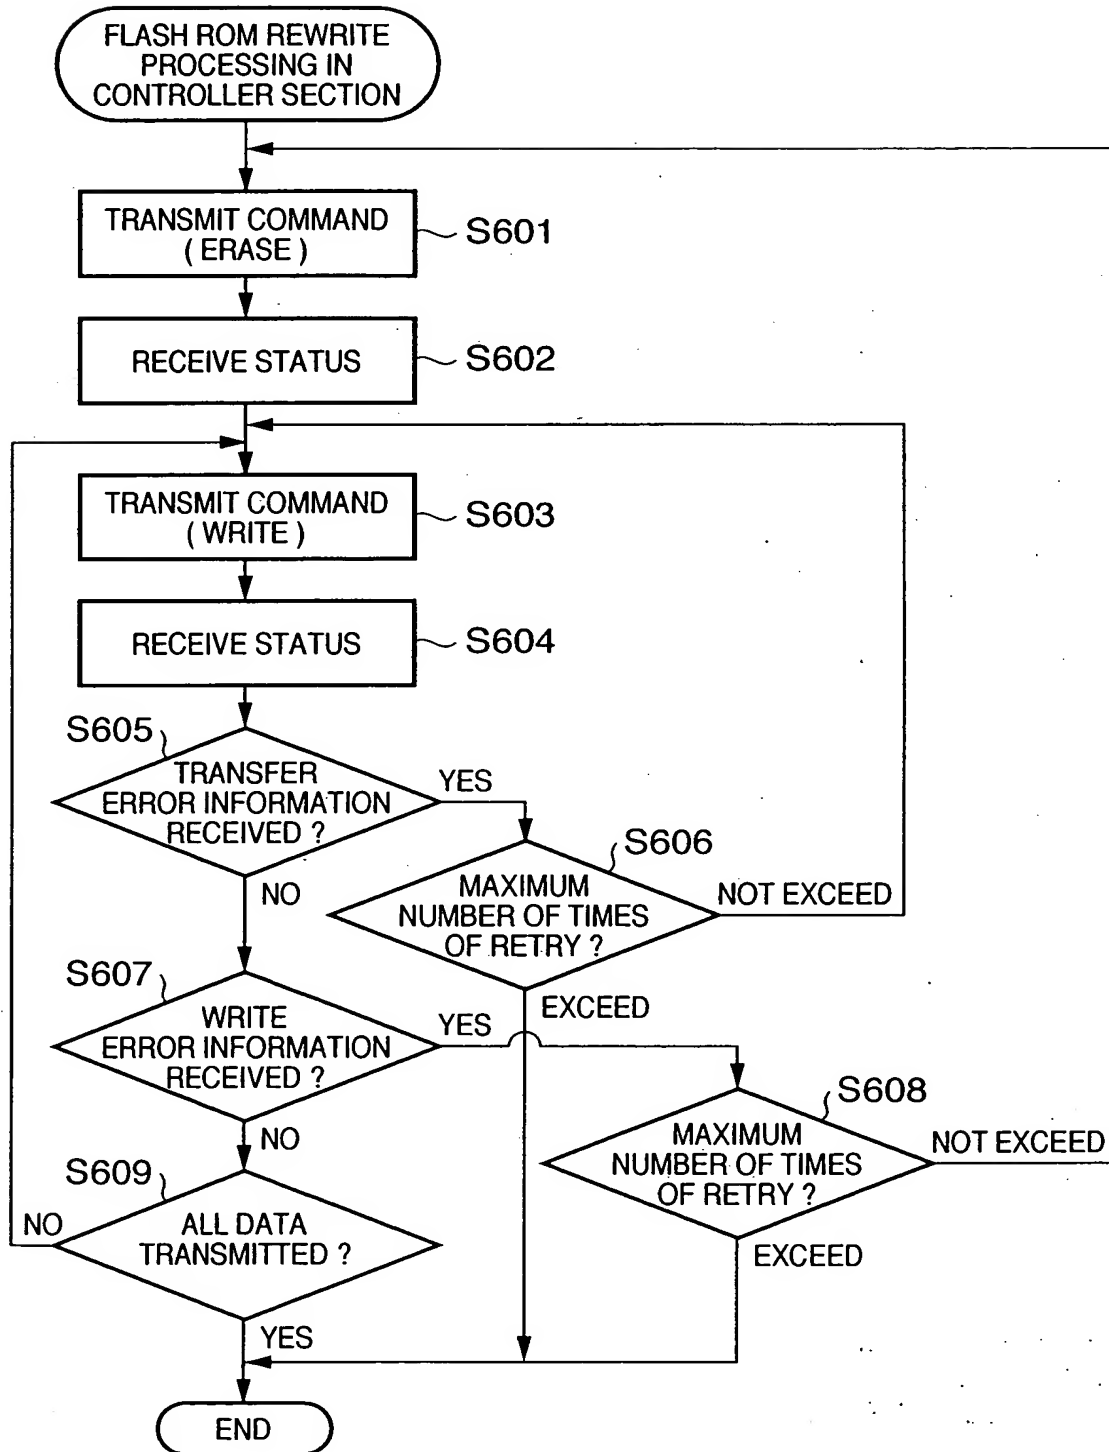


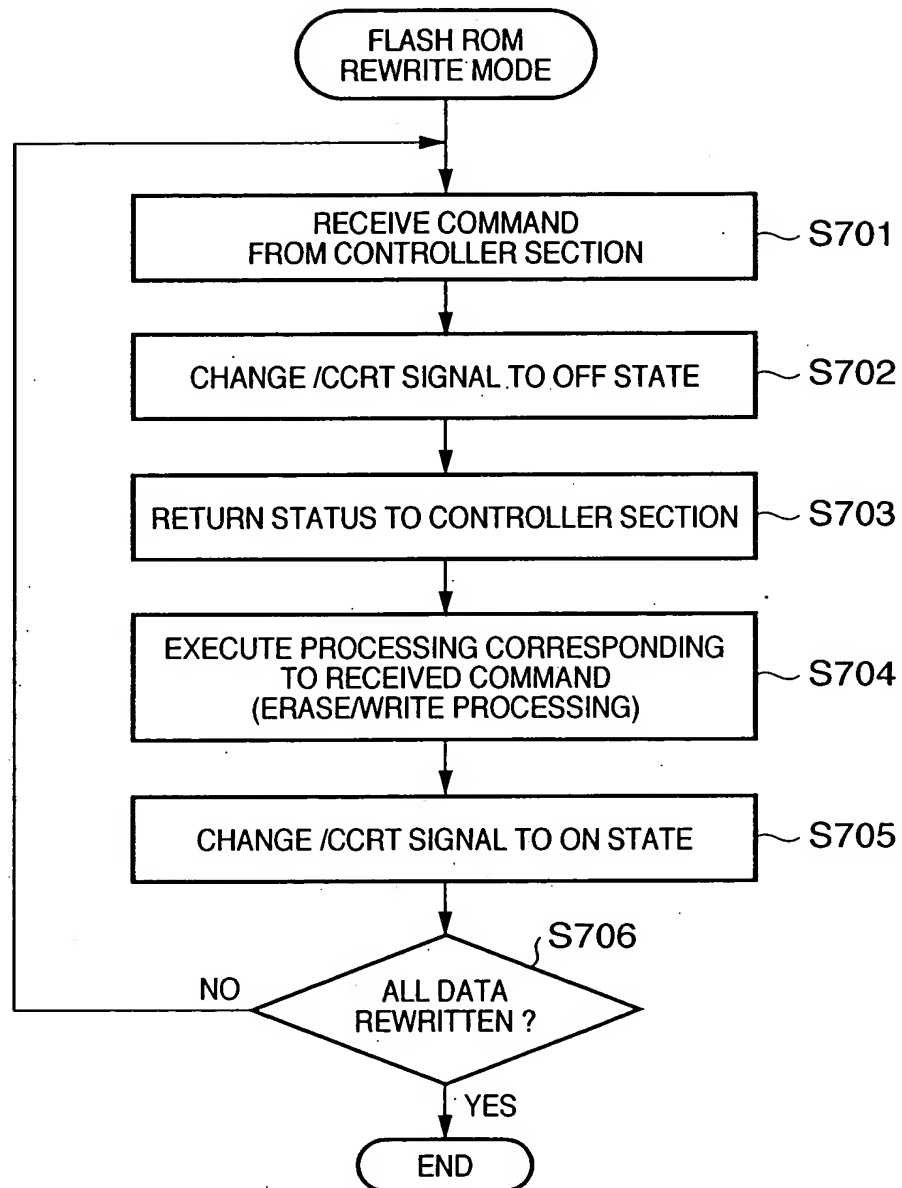
FIG. 7

FIG. 8

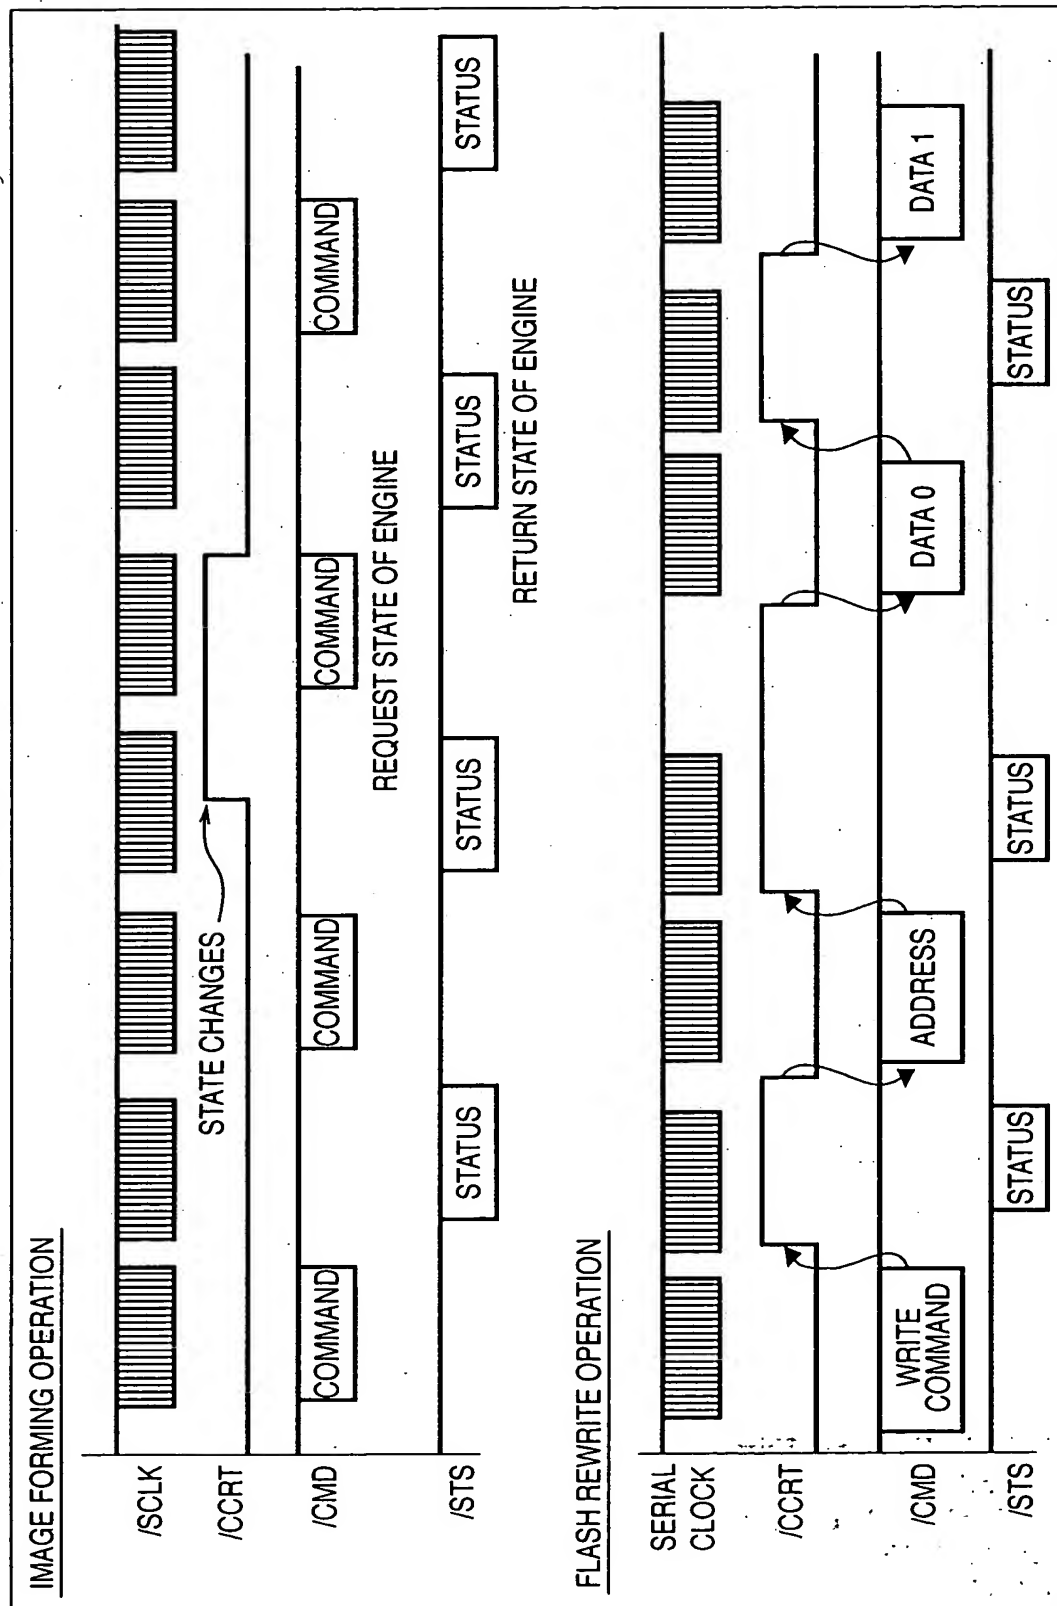


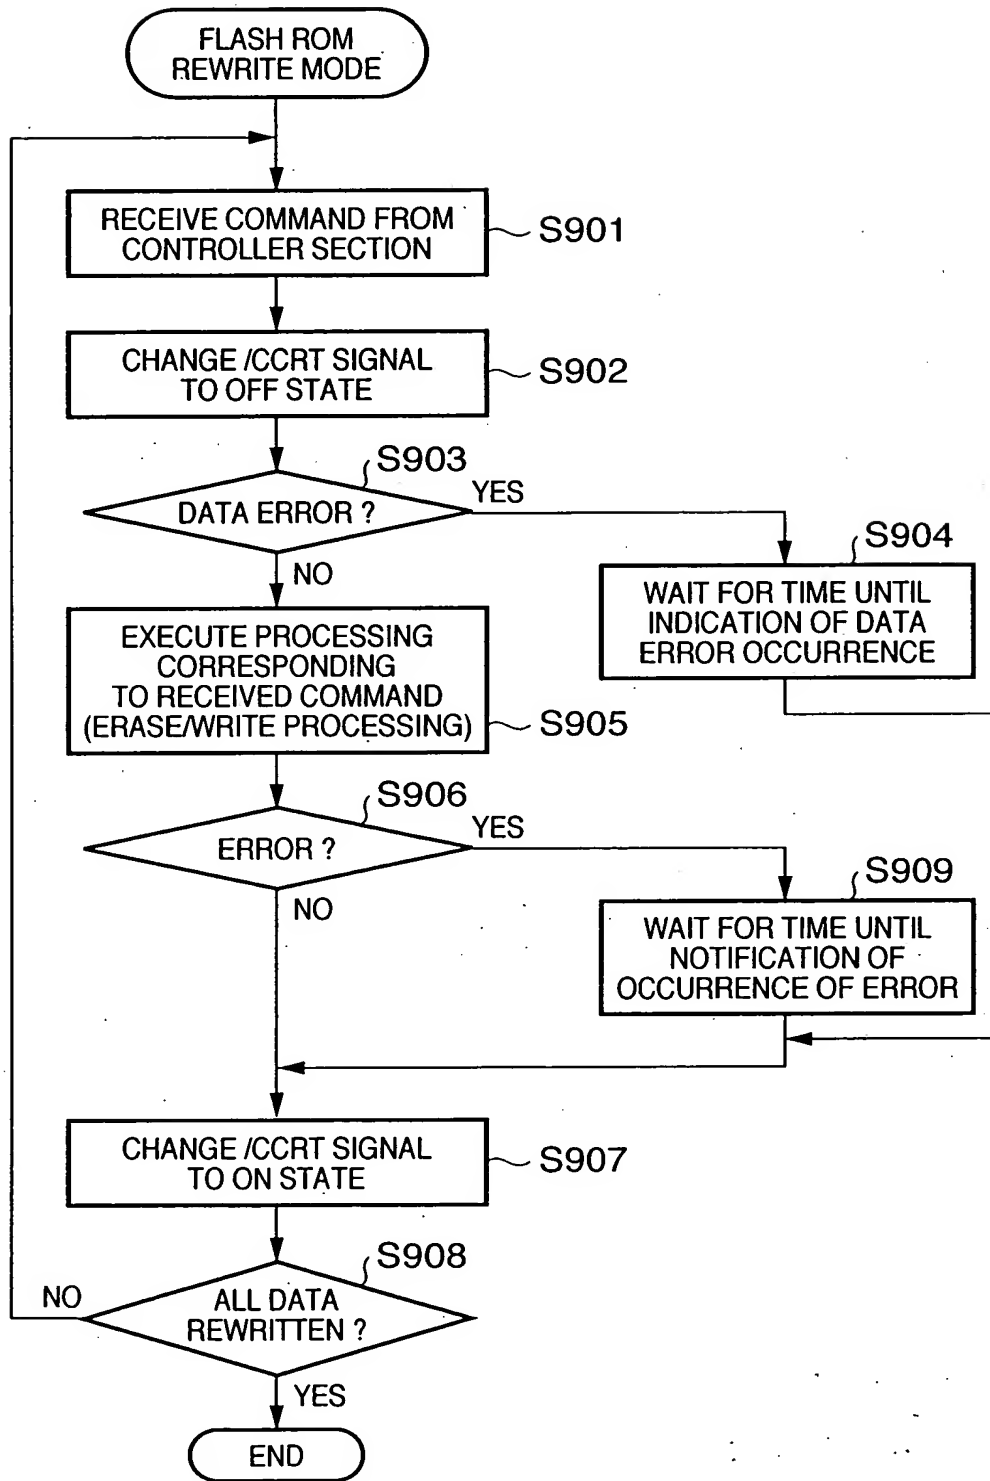
FIG. 9

FIG. 10

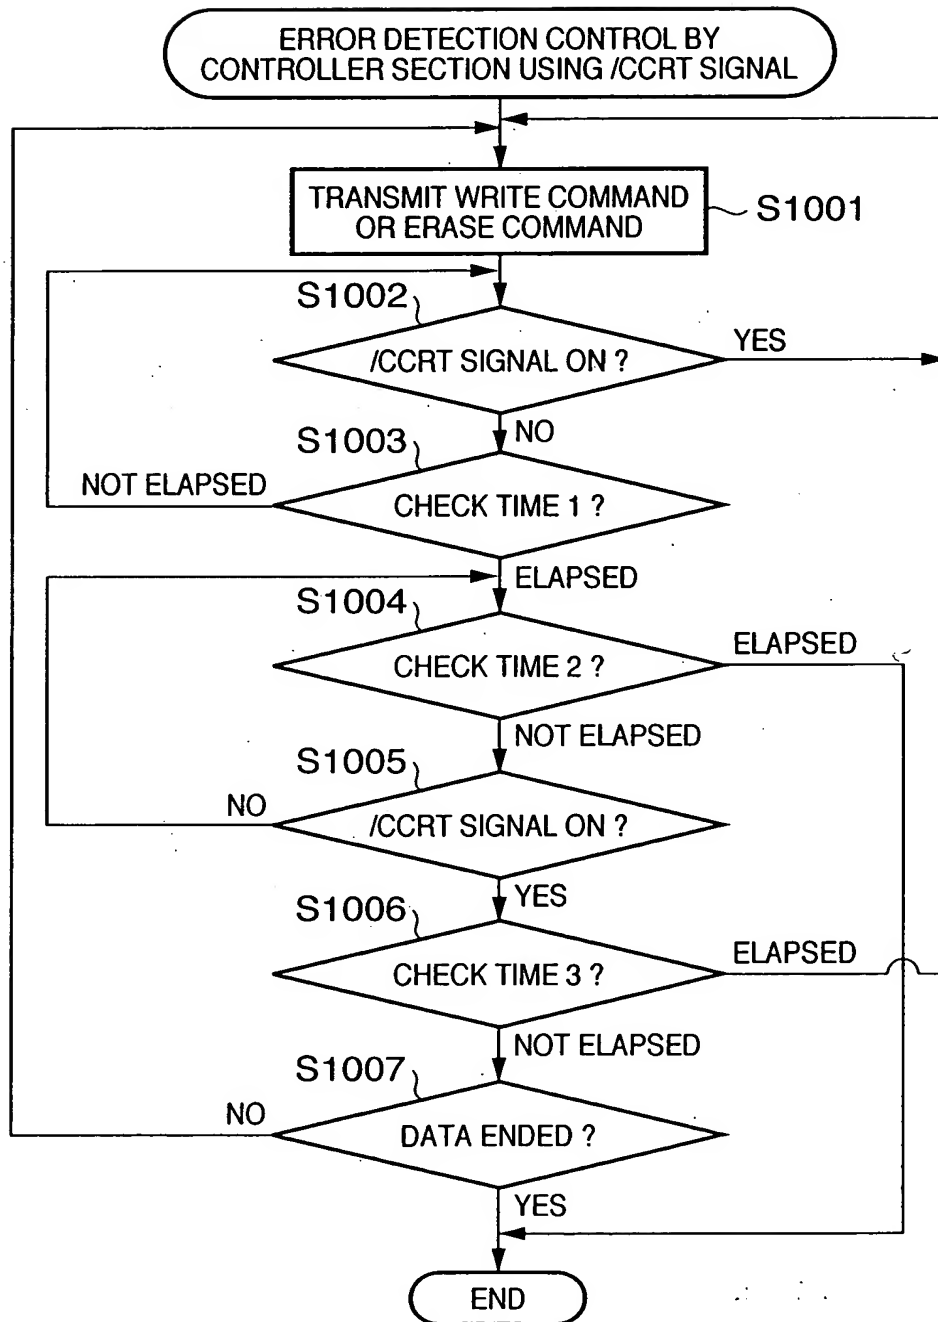


FIG. 11

FLASH REWRITE OPERATION

